

WATER MONITORING STATION

DATASHEET



Document Release Information

Persons in Charge		Document Information	
Technical Approval	Petar Ivanov	Version	3.1
Authors	Pavel Glavchev, Miroslav Gechev	Release Date	January 2021

Table of Contents

List of Figures.....	4
List of Tables.....	5
1. Brief Specification.....	6
2. Station Overview.....	7
3. Main Body	9
3.1. Main Controller	10
3.2. Power Sources.....	10
4. Sensors and Sensor Modules.....	11
4.1. Specification of Water Level Radar Sensor	11
4.2. Specification of Water Velocity Radar Sensor	12
4.3. Specification of Water Temperature Sensor	13
4.4. Specification of Wind Speed Sensor	14
4.5. Specification of Wind Direction Sensor.....	15
4.6. Advanced Precipitation Sensor Bucket	16
4.7. Precipitation Sensor Bucket.....	17
4.8. Specification of Temperature, Humidity, Pressure Sensor.....	18

List of Figures

Figure 1: Internal Overview of the Water Monitoring Station	7
Figure 2: Bottom View of the Water Monitoring Station	7
Figure 3: Water Monitoring Station with Water Level Radar Sensor, Water Velocity Radar Sensor, Advanced Precipitation Sensor, and Temperature, Humidity and Pressure Sensor	8
Figure 4: Water Monitoring Station's Main Body	9
Figure 5: Water Level Radar Sensor	11
Figure 6: Water Velocity Radar Sensor	12
Figure 7: Water Temperature Sensor	13
Figure 8: Wind Speed Sensor	14
Figure 9: Wind Direction Sensor	15
Figure 10: Advanced Precipitation Sensor	16
Figure 11: Precipitation Sensor	17
Figure 12: Temperature, Humidity, Pressure Sensor	18
Figure 13: Temperature, Humidity, Pressure Sensor Protective Enclosure	19

List of Tables

Table 1: Water Monitoring Station Brief Specification	6
Table 2: Main Body Specification	9
Table 3: Main Controller Specification	10
Table 4: Power Sources Specification	10
Table 5: Specification of Water Level Radar Sensor	11
Table 6: Specification of Water Velocity Radar Sensor	12
Table 7: Specification of Water Temperature Sensor	13
Table 8: Specification of Wind Speed Sensor	14
Table 9: Specification of Wind Direction Sensor	15
Table 10: Specification of Advanced Precipitation Sensor	16
Table 11: Specification of Precipitation Sensor	17
Table 12: Specification of Temperature, Humidity, Pressure Sensor	18

1. Brief Specification

Parameter	Description
Product Numbers	DWS3010AA
Hardware Version	3.1
GPS Module	Embedded
Water Monitoring Sensor Options:	Water Level Radar Sensor
	Water Velocity Radar Sensor
	Water Temperature Sensor
	Water Quality Sensors (avail. H2 2021)
Environmental Sensing Sensor Options:	Temperature, Humidity, and Pressure
	Wind Speed
	Wind Direction
	Advanced Precipitation Sensor (with heating)
Station Connectivity Options	Precipitation Sensor
	2G/3G
	LoRaWAN
Power Supply (all included by default)	NBLoT
	Power Grid (110V/220V)
	Solar Panel - 100W
Protection Level	Embedded UPS
Operating Temperature	IP65, for outdoor mounting
	- 30°C ~ + 70°C

Table 1: Water Monitoring Station Brief Specification

Key facts:

- Single device to monitor both watercourse and ambient environment parameters;
- Industrial-grade IP65 bodies, able to withstand all weather conditions;
- Operates autonomously with no need of access to the power grid;
- Utilizes modular design, permitting sensor upgrades, updates and add-ons;
- Fast and easy to install, maintain, and support;
- Provides effortless multi-platform integration using standard protocols.

2. Station Overview

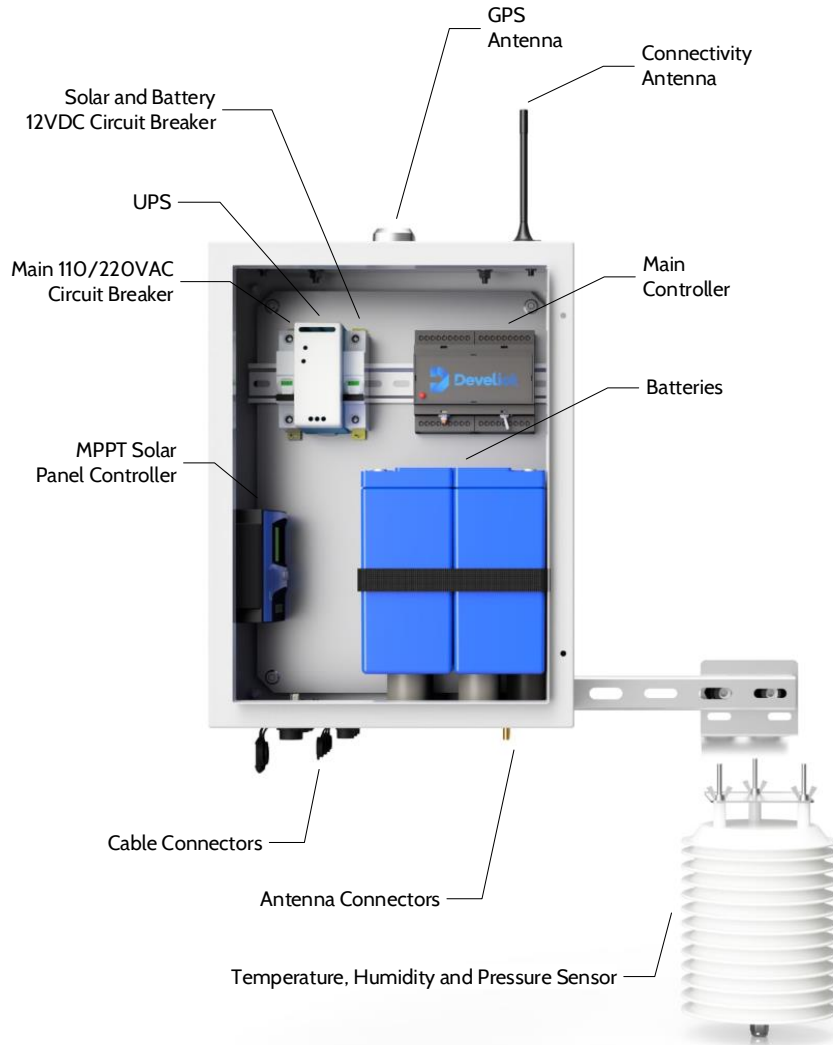


Figure 1: Internal Overview of the Water Monitoring Station

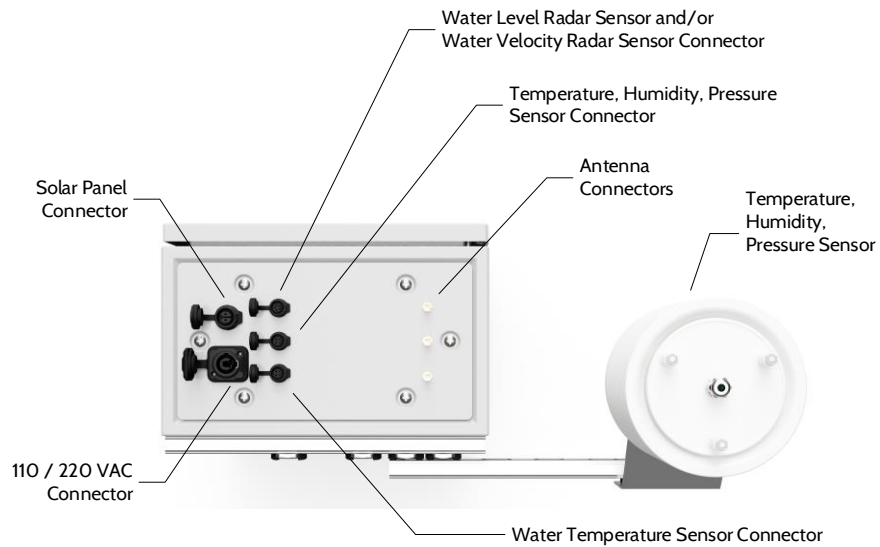


Figure 2: Bottom View of the Water Monitoring Station



Figure 3: Water Monitoring Station with Water Level Radar Sensor, Water Velocity Radar Sensor, Advanced Precipitation Sensor, and Temperature, Humidity and Pressure Sensor

3. Main Body

The Station's Main Body consists of a metal, robust, waterproof IP65 box designed for quick outdoor deployment on streetlight posts, masts, building fronts, etc.

The Main Body is shielding the Main Controller and the Power Distribution Components.



Figure 4: Water Monitoring Station's Main Body

The specification of the Main Body is the following:

Parameter	Value
Dimensions	310 mm x 430 mm x 220 mm
Minimum Dimension on Installation	400 mm x 500 mm x 300 mm
Material	Metal
Protection Level	IP65, for outdoor mounting

Table 2: Main Body Specification

3.1. Main Controller

The Main Controller manages the operation of the Water Monitoring Station. It gathers and transmits all sensor data, tracks GPS coordinates, and monitors various parameters related to the health status of the Station.

The specification of the Main Controller is the following:

Parameter	Value
Operating Temperature	- 30°C ~ + 70°C
Connectivity Options	2G
	LoRaWAN
	NBLoT
Connectivity Options for On-Site Diagnostics	WiFi
GPS Module	Embedded
Inputs / Outputs	UART
	I2C
	SPI
	RS485

Table 3: Main Controller Specification

3.2. Power Sources

The Water Monitoring Station embeds three power sources to ensure flexibility of installation and reliability during severe weather conditions.

The Station is designed to be easily connected to the power grid to ensure reliable power supply, however in cases when access to the power grid cannot be provided, the Station relies on a Solar Panel as a main energy source. If both of these power supplies are not available, the Station gets powered by an embedded high-capacity rechargeable battery. The average battery life without recharging is:

- 20 (twenty) days for stations without Advanced Precipitation Sensor (with heating);
- 2 (two) days for stations with Advanced Precipitation Sensor (with heating).

The specification of the Station's Power Sources is the following:

Parameter	Value
Power Grid Compatibility	110 / 220 VAC
Solar Panel Capacity	100 W
UPS Battery Capacity	2 x 12 VDC, 12 Ah

Table 4: Power Sources Specification

4. Sensors and Sensor Modules

4.1. Specification of Water Level Radar Sensor

The Water Level Radar Sensor adopts a radar-based distance measurement system working between 60GHz and 64GHz. It provides distance measurement with millimeter accuracy.



Figure 5: Water Level Radar Sensor

Parameter	Value
Target Parameter	Water Level
Detection Range	0.40 ~ 40 m
Resolution	0.1 cm
Accuracy	±1%
Storage Temperature	-40°C ~ +85°C
Storage Humidity	0 ~ 100% RH
Operating Temperature	-40°C ~ +85°C
Operating Humidity	0 ~ 100% RH
Size:	220 mm x 120 mm x 120 mm
Protection Level	IP65, for outdoor mounting

Table 5: Specification of Water Level Radar Sensor

4.2. Specification of Water Velocity Radar Sensor

The Water Velocity Radar Sensor adopts a radar-based motion detector system in the 24GHz - ISM - Band. The sensor can detect moving object in a distance from 0.3 to 150 m (depending on RCS of detected object).



Figure 6: Water Velocity Radar Sensor

Parameter	Value
Target Parameter	Water Velocity
Detection Range	0.2 ~ 70 m/s
Resolution	0.01 m/s
Accuracy	±0.1 m/s
Storage Temperature	-25°C ~ +60°C
Storage Humidity	0 ~ 100% RH
Operating Temperature	-25°C ~ +60°C
Operating Humidity	0 ~ 100% RH
Size	220 mm x 120 mm x 120 mm
Protection Level	IP65, for outdoor mounting

Table 6: Specification of Water Velocity Radar Sensor

4.3. Specification of Water Temperature Sensor

The Water Temperature Sensor is designed to be completely submersible under water to ensure accurate and consistent sensor readings. The sensor is positioned in a thermally conductive metal body.



Figure 7: Water Temperature Sensor

Parameter	Value
Target Parameter	Water Temperature
Detection Range	-20°C ~ +50°C
Resolution	0.0078°C
Accuracy	±0.1°C
Storage Temperature	-40°C ~ +80°C
Storage Humidity	0 ~ 100% RH
Operating Temperature	-20°C ~ +50°C
Operating Humidity	0 ~ 100% RH
Size	120 mm x 35 mm x 35 mm
Protection Level	IP68, for outdoor mounting

Table 7: Specification of Water Temperature Sensor

4.4. Specification of Wind Speed Sensor

The Wind Speed Sensor adopts a three-wind cup structure produced of ABS material with very high strength. The sensor comes with great resolution, which enables the speed detection to be triggered from very low speed air masses.



Figure 8: Wind Speed Sensor

Parameter	Value
Target Parameter	Wind Speed
Detection Range	0 ~ 45 m/s (0 ~ 162 km/h)
Resolution	0.1 m/s
Accuracy	0.5 m/s
Response Time	<1 sec
Storage Temperature	-20°C ~ +80°C
Storage Humidity	0 ~ 100% RH
Operating Temperature	-20°C ~ +80°C
Operating Humidity	0 ~ 100% RH
Size	Ø 180 mm x 158 mm
Protection Level	IP65, for outdoor mounting

Table 8: Specification of Wind Speed Sensor

4.5. Specification of Wind Direction Sensor

The Wind Direction Sensor adopts a precise internal angle sensor and low inertia ABS vane response for wind direction.



Figure 9: Wind Direction Sensor

Parameter	Value
Target Parameter	Wind Direction
Detection Range	0 ~ 359°
Resolution	1°
Accuracy	3°
Response Time	<1 sec
Storage Temperature	-20°C ~ +60°C
Storage Humidity	0 ~ 100% RH
Operating Temperature	-20°C ~ +60°C
Operating Humidity	0 ~ 100% RH
Size	Ø 223 mm x 190 mm
Protection Level	IP54, for outdoor mounting

Table 9: Specification of Wind Direction Sensor

4.6. Advanced Precipitation Sensor Bucket

The Precipitation Sensor rain gauge is an instrument used to measure rainfall. It is designed and constructed for long-term operation with minimal maintenance under almost all climatic conditions. All materials used are corrosion resistant.



Figure 10: Advanced Precipitation Sensor

Parameter	Value
Target Parameter	Rain, Precipitation
Detection Range	0.10 mm, 0.20 mm, 0.50 mm
Resolution	0.10 mm
Accuracy	± 3% over 25 mm/hr to 100 mm/hr
Response Time	<1 sec
Storage Temperature	-10°C ~ +60°C
Storage Humidity	0 ~ 100% RH
Operating Temperature	-10°C ~ +50°C
Operating Humidity	0 ~ 100% RH
Size	315 mm x 315 mm x 420 mm
Protection Level	IP54, for outdoor mounting

Table 10: Specification of Advanced Precipitation Sensor

4.7. Precipitation Sensor Bucket

The Precipitation Sensor adopts a precise self-emptying tipping bucket. Meteorological patented unique single spoon tipping bucket is one of the most accurate and reliable automatic rain gauges on the market. As an accessory a leaf grid with bird spikes can be provided.



Figure 11: Precipitation Sensor

Parameter	Value
Target Parameter	Rain, Precipitation
Detection Range	0.10 mm, 0.20 mm, 0.25 mm, 0.50 mm
Resolution	0.10 mm
Accuracy	±2%
Response Time	<1 sec
Storage Temperature	-20°C ~ +80°C
Storage Humidity	0 ~ 100% RH
Operating Temperature	0°C ~ +60°C
Operating Humidity	0 ~ 100% RH
Size	Ø 200 mm x 255 mm
Protection Level	IP54, for outdoor mounting

Table 11: Specification of Precipitation Sensor

4.8. Specification of Temperature, Humidity, Pressure Sensor

The Temperature, Humidity, Pressure Sensor is enclosed in a specially designed protective shield located on the right side of the Main Body. The Sensor's protective shield ensures constant natural air convection in order to achieve accurate and consistent sensor readings.



Figure 12: Temperature, Humidity, Pressure Sensor

Parameter	Value
Target Parameters	Temperature
	Humidity
	Pressure
Detection Range - Temperature	-40 ~ 80°C
Detection Range - Humidity	0 ~ 100% RH
Detection Range - Pressure	300 ~ 1100 hPa
Resolution - Temperature	0.0078°C
Resolution - Humidity	0.008 %RH
Resolution - Pressure	0.0018 hPa
Accuracy - Temperature	0.1°C
Accuracy - Humidity	3%
Accuracy - Pressure	1.5 hPa
Response Time	1 sec
Storage Temperature	-40 ~ 80°C
Storage Humidity	0 ~ 100% RH
Storage Pressure	0 ~ 2000 hPa
Operating Temperature	-40 ~ 80°C
Operating Humidity	0 ~ 100% RH
Operating Pressure	300 ~ 1100 hPa
Size	59 mm x 59 mm x 11 mm
Size with Shield	370 mm x 140 mm x 170 mm

Table 12: Specification of Temperature, Humidity, Pressure Sensor



Figure 13: Temperature, Humidity, Pressure Sensor Protective Enclosure